PRODUCT INFORMATION PACKET

Model No: D674 Catalog No: D674 Fan and Blower Motor, 1/10-1/15 HP, 1 Ph, 60 Hz, 230 V, 1500 RPM, 2 Speed, 4.4" Diameter, OAO



Regal and Fasco are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Product Information Packet: Model No: D674, Catalog No:D674 Fan and Blower Motor, 1/10-1/15 HP, 1 Ph, 60 Hz, 230 V, 1500 RPM, 2 Speed, 4.4" Diameter, OAO

FASCO

Nameplate Specifications

Output HP	1/10-1/15 Hp	Output KW	0.07 kW
Frequency	60 Hz	Voltage	230 V
Current	2.0-1.3 A	Speed	1500 rpm
Service Factor	1	Phase	1
Duty	Air Over	Insulation Class	В
Frame	4.4	Enclosure	Open Air Over
Thermal Protection	Thermally Protected	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
CE	N	Number of Speeds	2


Technical Specifications

Electrical Type	Shaded Pole	Starting Method	Across The Line
Poles	4	Rotation	Clockwise Shaft End
Mounting	Extended Studs	Drive End Bearing	Sleeve
Opp Drive End Bearing	Sleeve	Frame Material	Na
Shaft Type	Flat	Overall Length	6.62 in
Shaft Diameter	0.375 in	Shaft Extension	2.5 in
Connection Drawing	SEE OUTLINE	Outline Drawing	71080239

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:11/29/2022

Uncontrolled Copy

4

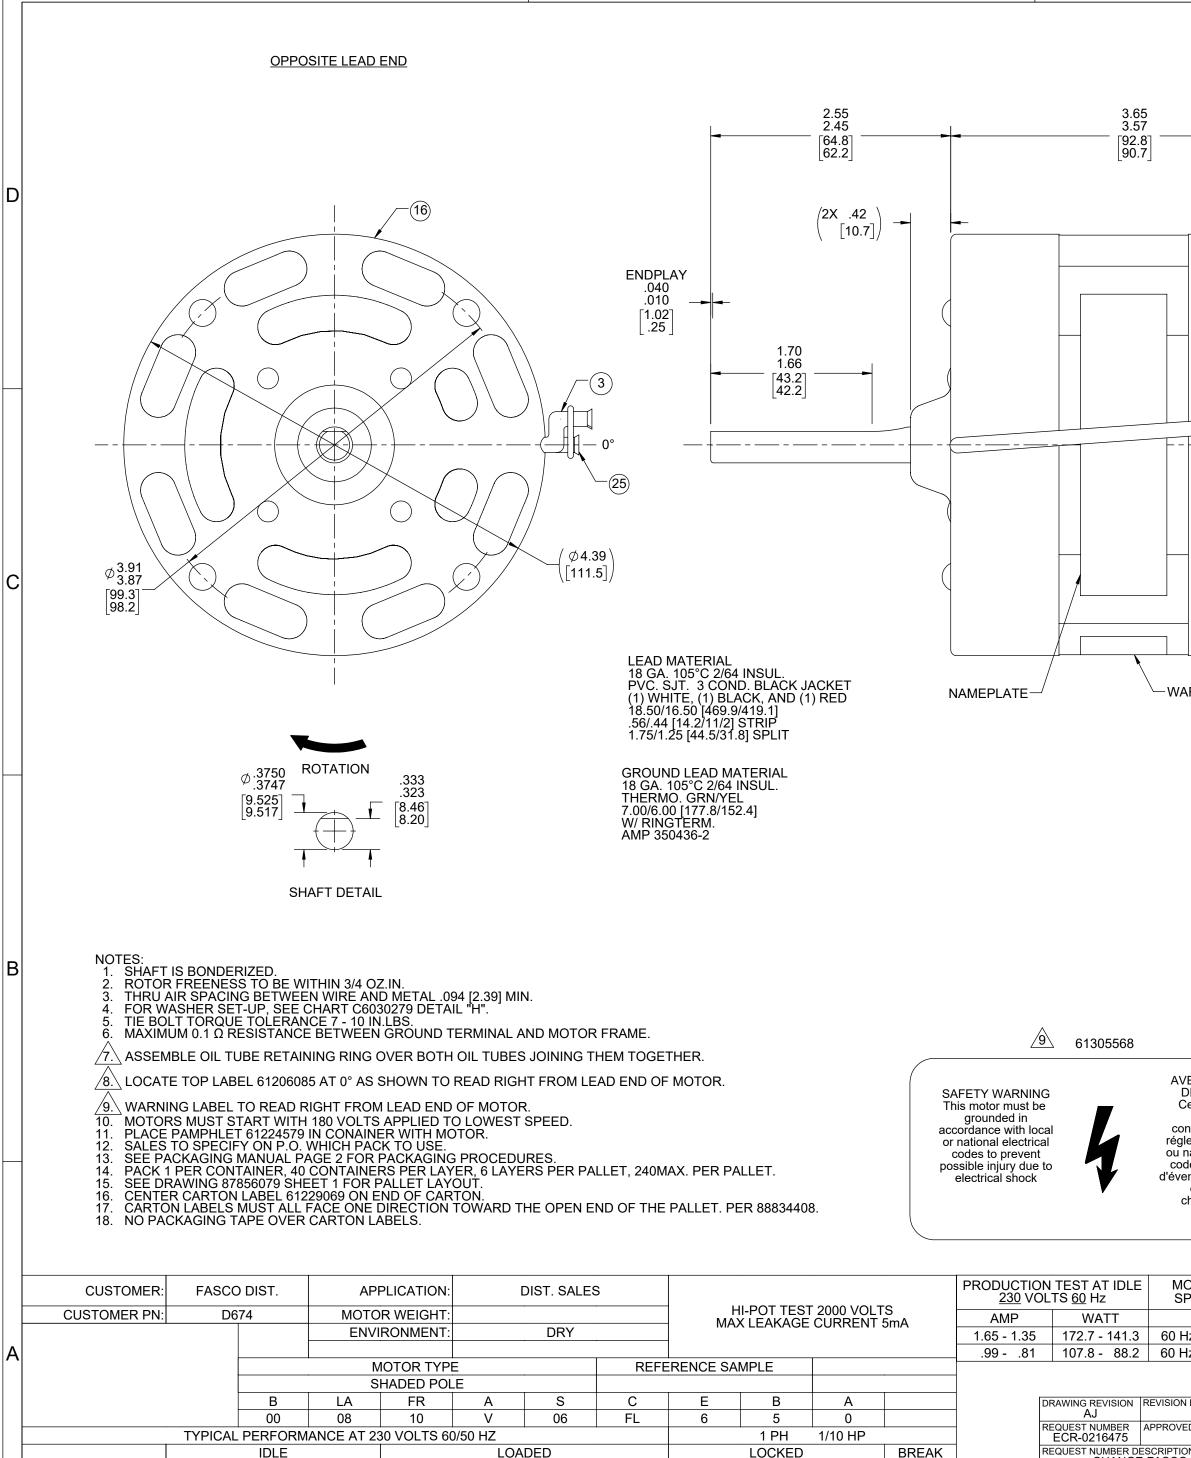

3

IDLE LOADED LOCKED BREAK CHANGE FASC MOTOR SPEED RPM AMP WATT RPM WATT IN OZ AMP IN OZ IN OZ AMP WATT COPYRIGHT (PER REVISION DATE) RE PROPRIETARY AND CONFIDENTIAL INF REGAL BELOIT AMERICA, INC. ("OV INFORMATION. ANY PERSON, CORPO BY RECEIVING IT, TO AGREE THAT IT, / 60 Hz HIGH 1767 157 87 1500 1.9 273 32 2.5 341 89 1.5 60 Hz LOW 1763 98 1500 1.2 169 21 1.6 203 55 .9 54 TO ANY PERSON, CORPORATION OR O AS EXPRESSLY APPROVED IN WRITIN 50 Hz HIGH 1460 1250 42 3.1 1.6 164 106 2.2 315 446 120 BE RETURNED TO OWNER UPO RESTRICTIONS UNDER APPLICABI 50 Hz LOW 1460 1.1 100 66 1250 1.3 187 30 1.8 240 75 4

2	1]
	LEAD END	
	4X 10.32 UNF-2A THD. OP LABEL 4X 45 [11.4]	
RTISSEMENT SÉCURITÉ	00464072 00464551	
moteur doit être ondée sur premément à la nentation locale ional électrique s pour prévenir uelles blessures n raison de oc électrique	FASCO™ Image: Second seco	ne ne
Y REV DATE/© D	LOCATE & OF NAMEPLATE ON & OF STATOR TO READ RIGHT FROM LEAD END OF MOTOR CENTER	RAT 0°.
SDM 3/25/202: BY DATE MLS DATE 3/25/202: 3/25/202:	22 DEC. INCH mm ANGLÉ SDM Regains	