

PRODUCT INFORMATION PACKET

FASCO®

Model No: D1178

Catalog No: D1178

OEM Replacement Motor, 1/15 HP, 1 Ph, 60 Hz, 208-230 V, 3450/2875 RPM, 1 Speed, 3.3" Diameter, OAO



Regal and Fasco are trademarks of Regal Rexnord Corporation or one of its affiliated companies.
©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E

RegalRexnord



Nameplate Specifications

Output HP	1/15 Hp	Output KW	0.05 kW
Frequency	60 Hz	Voltage	208-230 V
Current	.5 A	Speed	3450/2875 rpm
Service Factor	1	Phase	1
Duty	Air Over	Insulation Class	B
Frame	3.3	Enclosure	Open Air Over
Thermal Protection	Thermally Protected	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
CE	N	Number of Speeds	1




Technical Specifications

Electrical Type	Permanent Split Capacitor	Starting Method	Across The Line
Poles	2	Rotation	Clockwise Shaft End
Mounting	Extended Studs	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Steel
Shaft Type	Double Flat	Overall Length	9.82 in
Frame Length	4.39 in	Shaft Diameter	0.312 in
Shaft Extension	2.80 in		
Outline Drawing	71624015	Connection Drawing	00469129

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:11/29/2022

BACK END

FRONT END

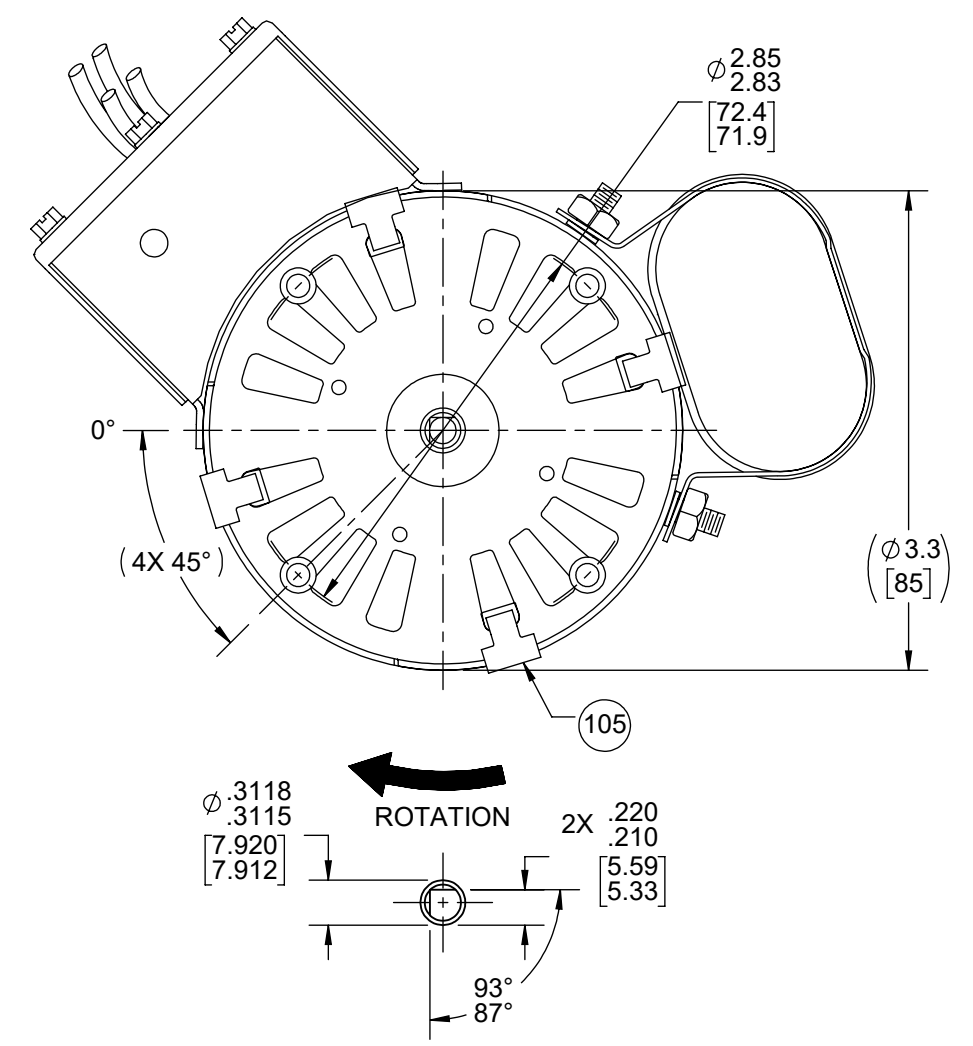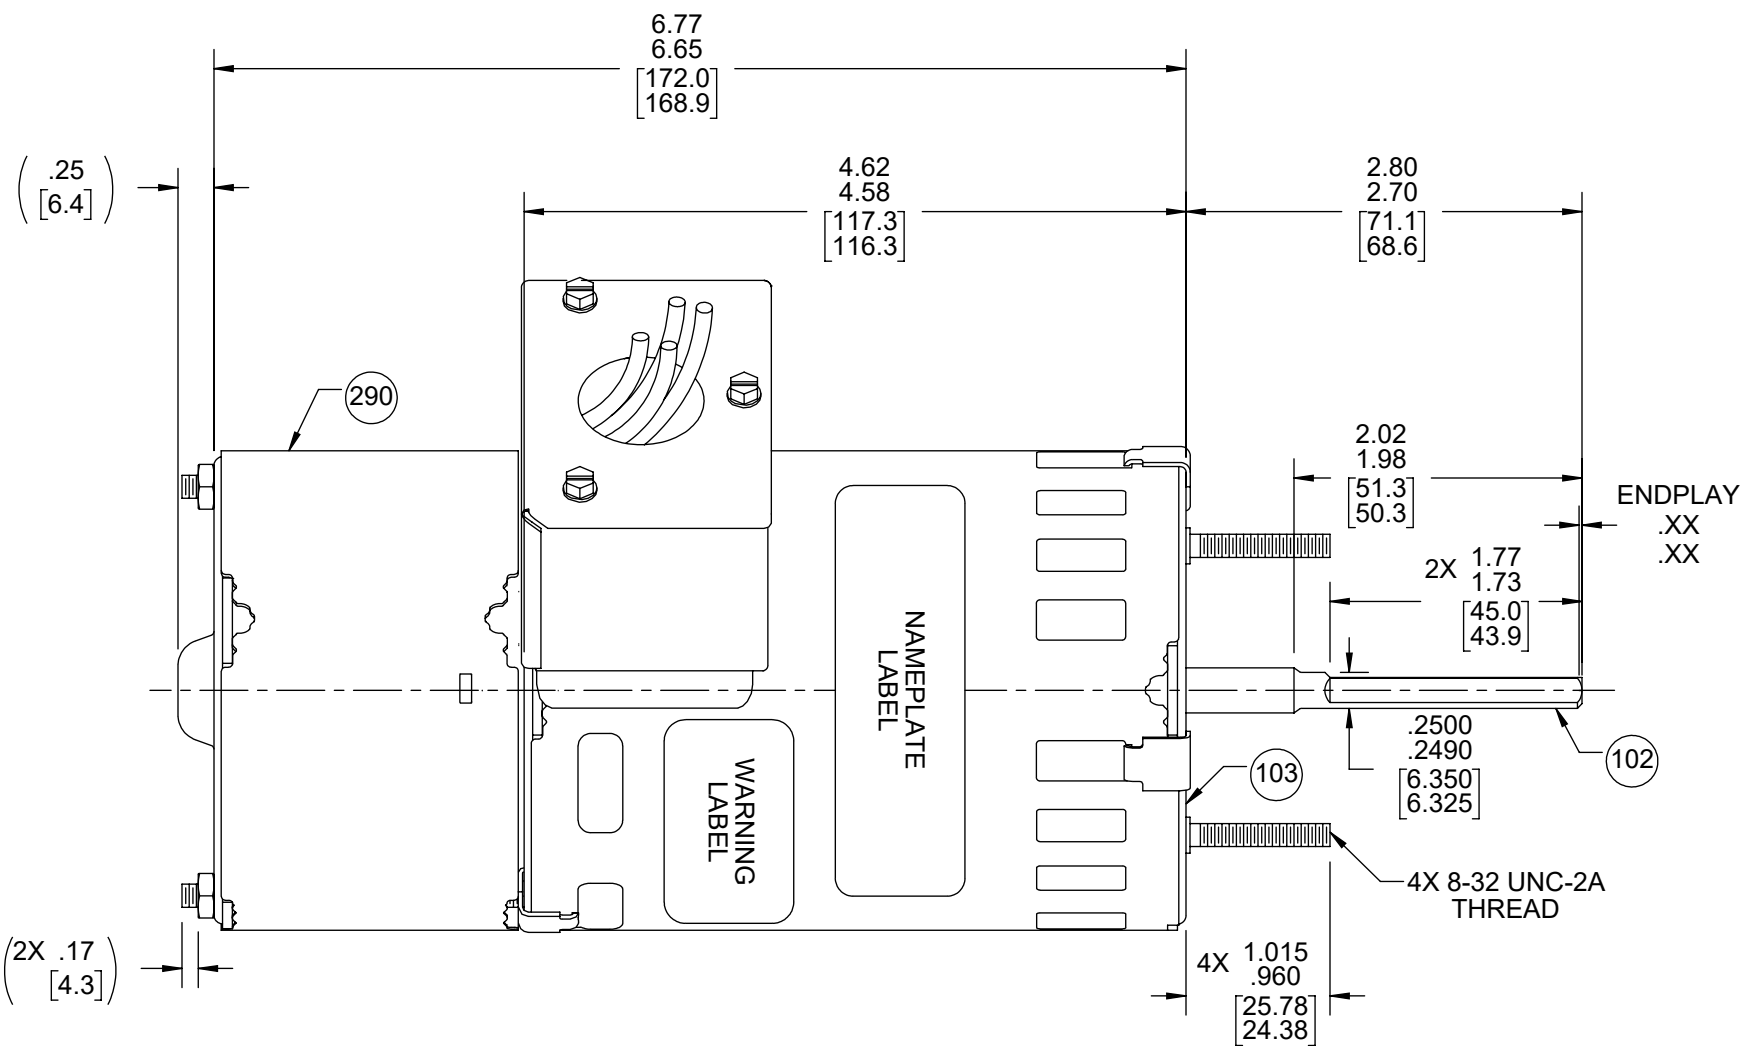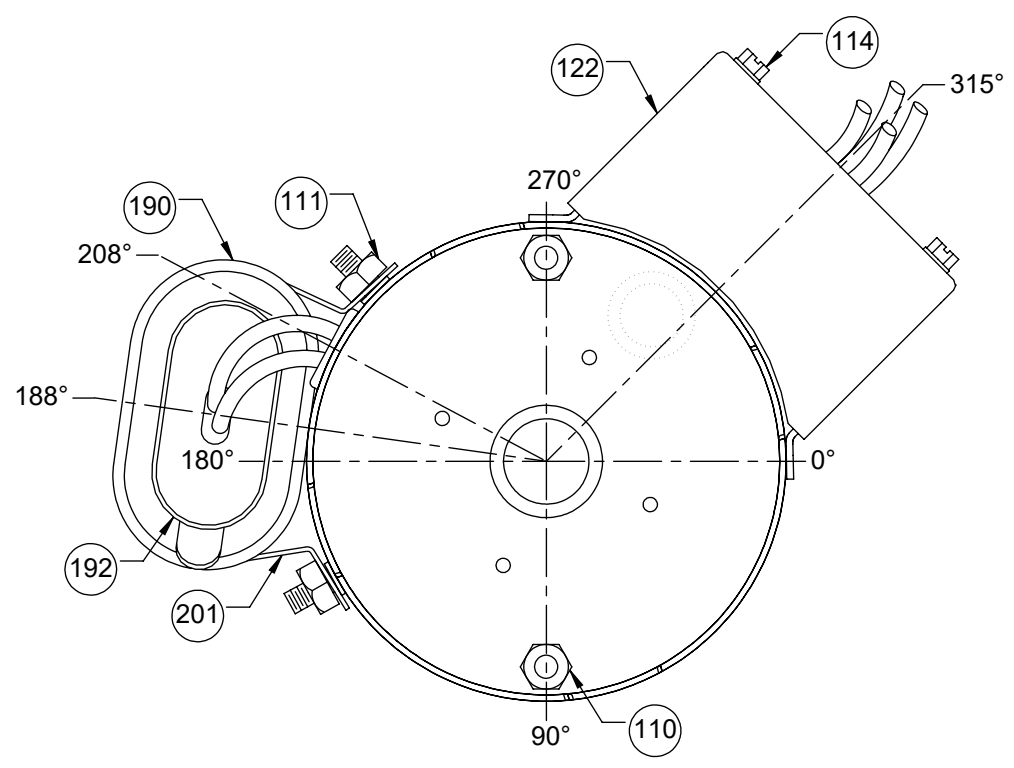

LEAD MATERIAL
 18 GA. 125°C 2/64 INSUL.
 X-LINKED POLY
 (1) BLACK AND (1) YELLOW
 13.00/11.00 [330.2/279.4]
 56/44 [14.2/11.2] STRIP
 (2) BROWN CAPACITOR LEADS
 6.00/4.00 [152.4/101.6]
 W/ FFLAG TERMS.
 AMP 42742-2
 (2) RED SWITCH LEADS
 17.00/15.00 [431.8/381.0]
 56/44 [14.2/11.2] STRIP

- NOTES:
 1. SWITCH RATING: 250 VAC, 5 AMP, CHECK SWITCH PERFORMANCE 100%.
 2. MOTOR USES 416 SS SHAFT.
 3. NO PACKAGING TAPE OVER CARTON LABEL.

SAFETY WARNING
 This motor must be grounded in accordance with local or national electrical codes to prevent possible injury due to electrical shock

AVERTISSEMENT DE SÉCURITÉ
 Ce moteur doit être fondée sur conformément à la réglementation locale ou national électrique codes pour prévenir d'éventuelles blessures en raison de choc électrique

61305568 00464072 00469129

FASCO™ **SP RLC**

Assembled in Mexico

No. 71624015 TYPE U62B1 T.P. AO LR6319

208-230 V 60/50 Hz Class B 1/15 HP

0.5 A 3450/2875 RPM Sealed Ball Brg

Model D1178

SW280-1 125VA-120V

Connection Diagram
 Blk Line
 Yel Line
 Brn
 Brn
 Red
 Red



4 MFD/370 VAC

61299553

CUSTOMER:	FASCO DIST.	APPLICATION:	ROOF TOP UNIT
CUSTOMER PN:	D1178	MOTOR WEIGHT:	4.62 LBS
		ENVIRONMENT:	WET
HORIZONTAL	MOTOR TYPE		REFERENCE SAMPLE
	P.S.C.		
	B	LA	A
	00	62	34
		FR	F
		05	0
		S	0
		C	0
		E	0
		B	0
		A	0
TYPICAL PERFORMANCE AT 230 VOLTS 60 HZ			
CAP: 4 MFD/370 VAC			
MOTOR SPEED	IDLE		LOADED
	RPM	WATT	WATT
	3567	.26	58
		19.1	3450
		.41	92
		19.9	1.08
		248	48.5

DRAWING REVISION UB	REVISION BY MLS	REV DATE/DATE 7/6/2022	TOLERANCES (EXCEPT AS NOTED): DEC. INCH mm ANGLE	DRAWN BY S.M.MAGGARD	Regal Rexnord Regal Beloit America, Inc.
REQUEST NUMBER ECR-0219182	APPROVED BY KKM	DATE 7/6/2022	.X ±0.1 [±3] .XX ±0.01 [±0.3] .XXX ±0.005 [±0.13] .XXXX ±0.0005 [±0.013]	DATE 11-01-2001	DESCRIPTION OUTLINE MOTOR ASSY
REQUEST NUMBER DESCRIPTION UPDATED FASCO LOGO ON NAMEPLATE LABEL	REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [.08/.38] X 45° CORNER FILLETS: R.02 [5] MACHINED SURFACES: .125/ mm 3.2 mm DIMENSIONS IN [BRACKETS] INCH/mm ARE FOR REFERENCE ONLY		DATE	PROCESS/FINISH BLACK PAINT	
THIRD ANGLE PROJECTION			SIZE C	DRAWING NUMBER 71624015	SHEET 1 OF 2

- NOTES:
1. STAKE STATOR TO MAIN FRAME PER 88830264.
 2. MAXIMUM TORQUE REQUIRED TO TURN MOTOR SHAFT IS 3/8 INCH-OUNCE.
 3. ASSEMBLE SPRING BETWEEN WASHER AND BEARING ON BACK END, WITH SPRING FINGERS TOWARD BEARING.
 4. STRING LINE AND SWITCH LEADS THROUGH CONDUIT BOX COVER PRIOR TO ATTACHING COVER TO BOX WITH (3) SCREWS.
 5. ASSEMBLE BALL BEARINGS TO BEARING RETAINERS PER 88834419.

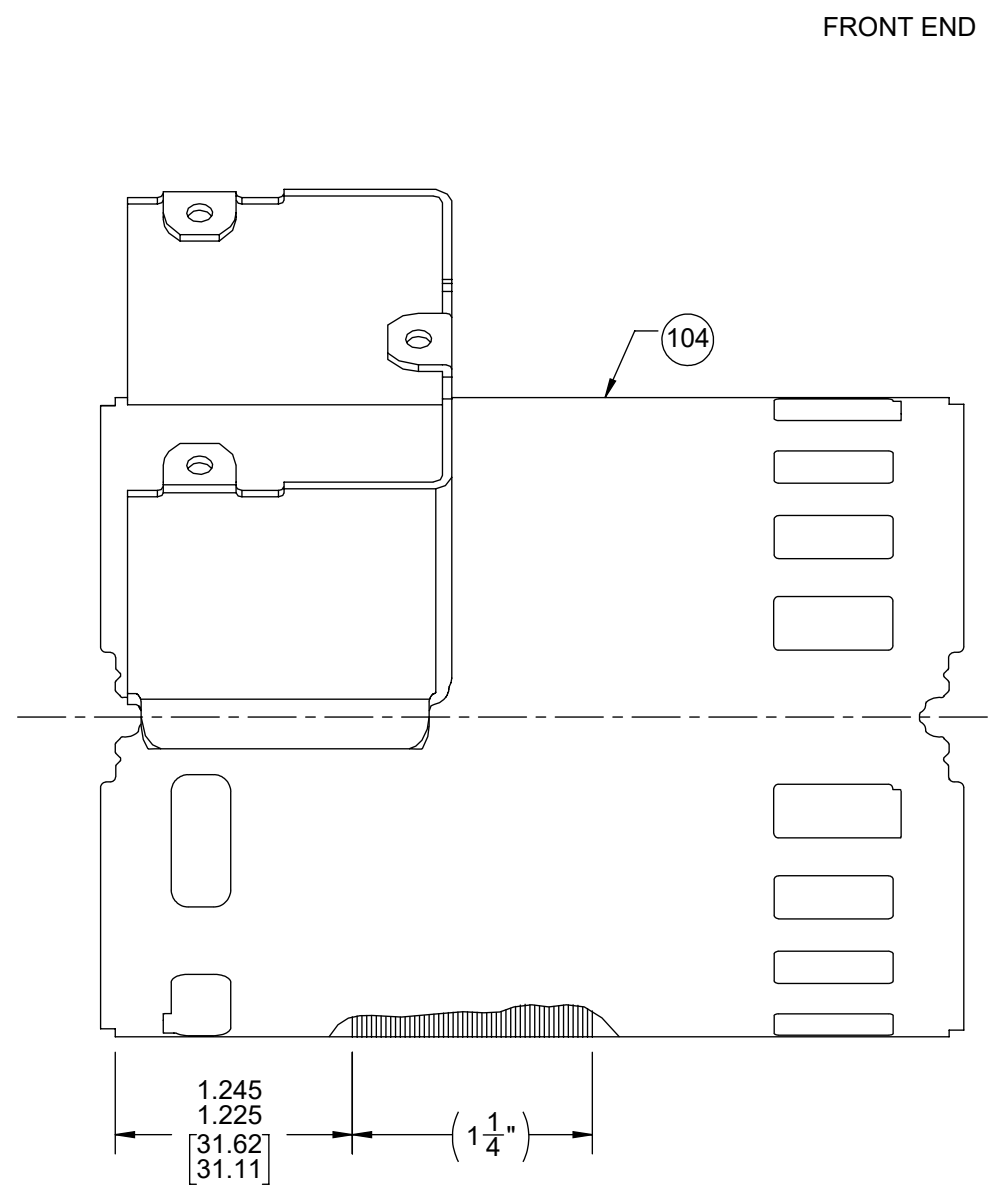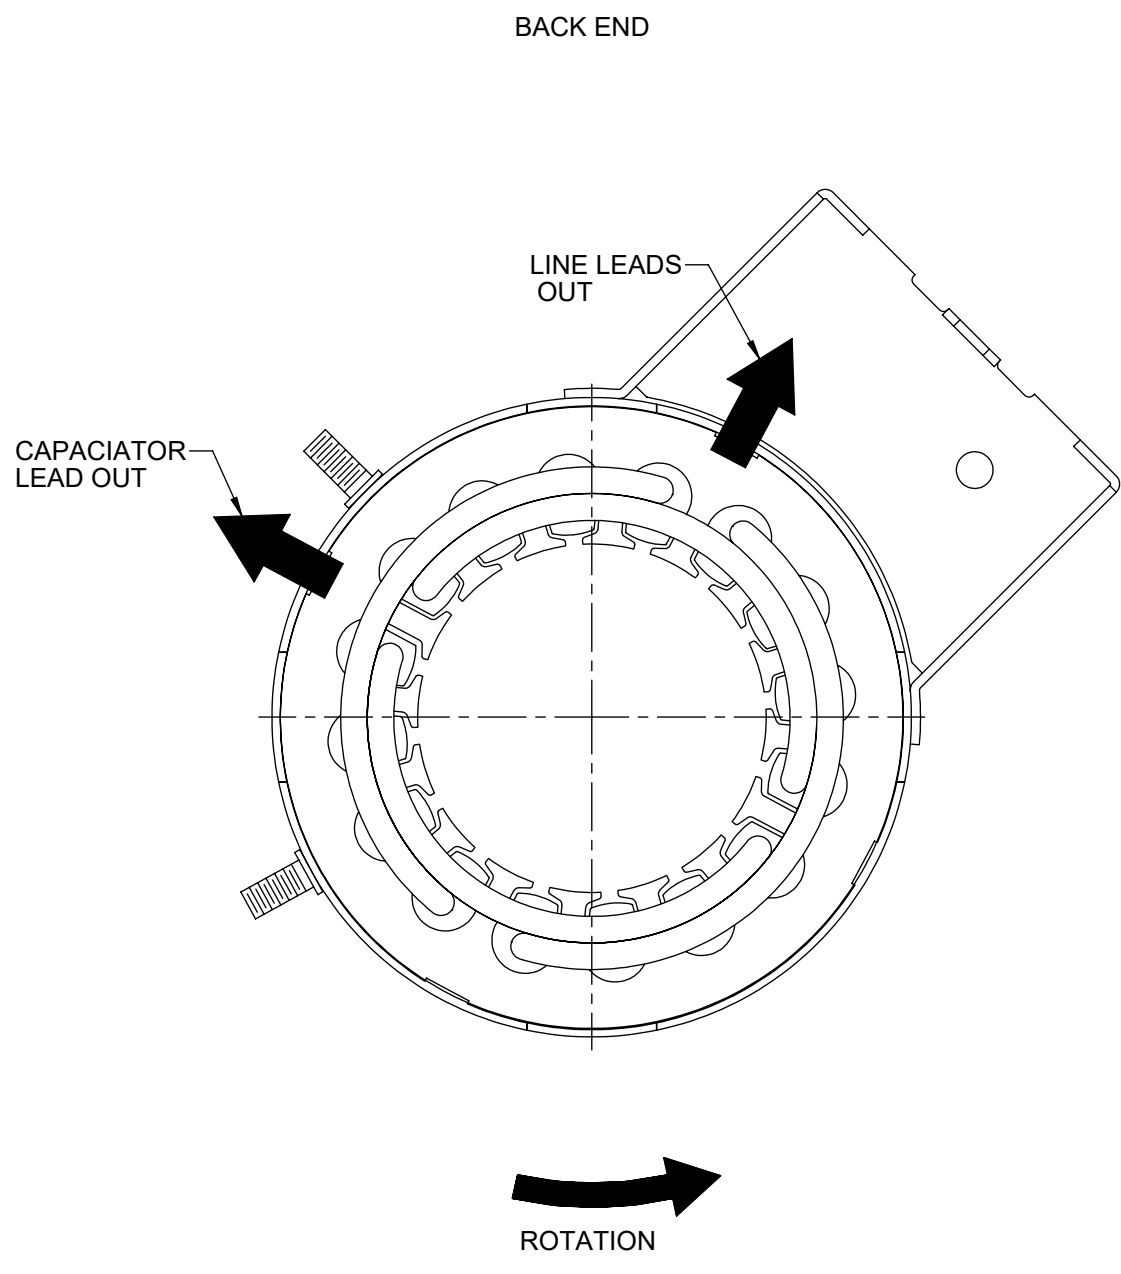

SWITCH INSTRUCTIONS

1. PRESS ACTUATOR ASSEMBLY AND THIMBLE ON SHAFT SO THAT TOP OF PLATE ON ACTUATOR IS LOCATED .568/.548 [14.43/13.92] FROM END OF SHAFT.
2. SWITCH MUST BE ADJUSTED TO OBTAIN .035/.025 [.89/.64] AIR GAP BETWEEN THIMBLE AND SWITCH IN FULL OPERATING POSITION.
3. SWITCH MUST MAKE CONTACT BETWEEN 1800-2500 RPM AS SPEED INCREASES AND BREAK 50-500 RPM BELOW ACTUAL MAKE.
4. ASSEMBLE SWITCH AND ACTUATOR PER 88834261.
5. SWITCH MECHANISM TO GIVE QUIET OPERATION ABOVE 2500 RPM.
6. TIE SWITCH LEADS TO WELDBOLTS (2) PLACES WITH CABLE TIES PRIOR TO STRINGING LEADS THROUGH LEAD EXIT IN CLIP PLATE. SWITCH LEADS TO EXIT WITH LINE LEADS THROUGH CONDUIT BOX.

PACKING SPECIFICATIONS

1. PACK 1 PER CARTON, 18 PER LAYER, 6 LAYERS PER PALLET, 108 MAX. PER PALLET, PER 88834200.
2. PLACE MOTOR IN PLASTIC BAG, PLACE FOAM RING OPPOSITE SHAFT END, PLACE A 3 1/4" FILLER TUBE OVER SHAFT EXTENSION AND PLACE IN CARTON. CLOSE FLAPS AND TAPE. PLACE CARTON LABEL ON SHAFT END OF CARTON. LAY CARTONS ON SIDE ON PALLET.
3. PLACE ONE FLAT PAD ON PALLET AND ONE BETWEEN EACH LAYER.
4. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE 88834408.
5. NO PACKAGING TAPE OVER CARTON LABEL.

DRAWING REVISION UB	REVISION BY MLS	REV DATE/© DATE 7/6/2022	TOLERANCES (EXCEPT AS NOTED):		DRAWN BY S.M.MAGGARD		Regal Beloit America, Inc.
REQUEST NUMBER ECR-0219182	APPROVED BY KKM	DATE 7/6/2022	DEC. .X ±0.1 [±3] ±1°	INCH .XX ±0.01 [±0.3]	DATE 11-01-2001		
REQUEST NUMBER DESCRIPTION UPDATED FASCO LOGO ON NAMEPLATE LABEL			.XXX ±0.005 [±0.13]	.XXXX ±0.0005 [±0.013]	APPROVED BY	DESCRIPTION	OUTLINE MOTOR ASSY
<small>COPYRIGHT (PER REVISION DATE) REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ('OWNER') AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.</small>			REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [.08/.38] X 45°		DATE	MATERIAL	
			CORNER FILLETS: R.02 [5]		REFERENCE	PROCESS/FINISH BLACK PAINT	
			MACHINED SURFACES: .125/ mm 3.2 INCH/mm		THIRD ANGLE PROJECTION	SIZE C	DRAWING NUMBER 71624015
			mm DIMENSIONS IN [BRACKETS] ARE FOR REFERENCE ONLY			SHEET 2 OF 2	